


# Stand

# alone

ACCESS CONTROL SYSTEM

## Model K2s

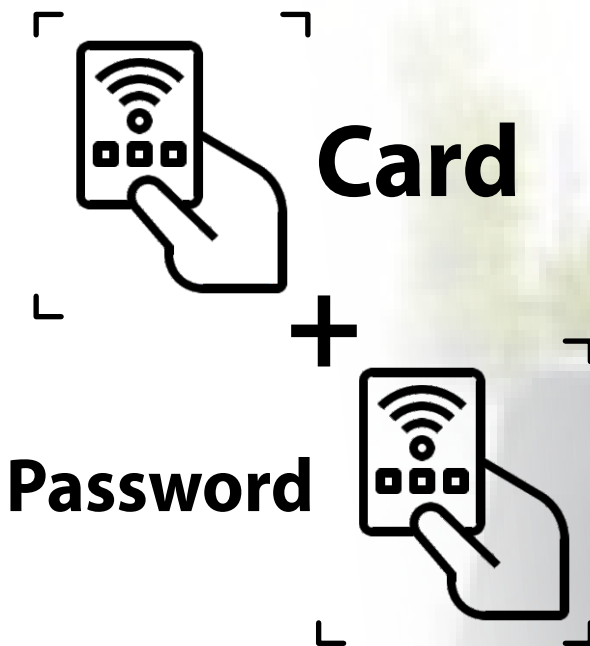

Card

Password



### Specifications :

- Card Type : EM/Mifare/HID/CPU
- Working Voltage : DC 12V - 24V
- Reading Range : 2-5cm
- Operating Humidity : 0% - 95%
- Door Opening Time : 0-99s

- Alarm Output Load :  $\leq 20\text{mA}$
- Idle Current :  $\leq 30\text{mA}$
- Operating Temperature :  $-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Lock Output Load :  $\leq 1\text{A}$
- Short-Circuit Protect Time :  $\leq 100\mu\text{s}$

### Product Feature :

- Backlight Keypad
- Wiegand 26 Input and Output
- Capacity : 2,000 users

- Can set relay toggle mode
- Three Accesses, Card only, Card + PIN, Card or PIN
- Mobile APP